



1/6

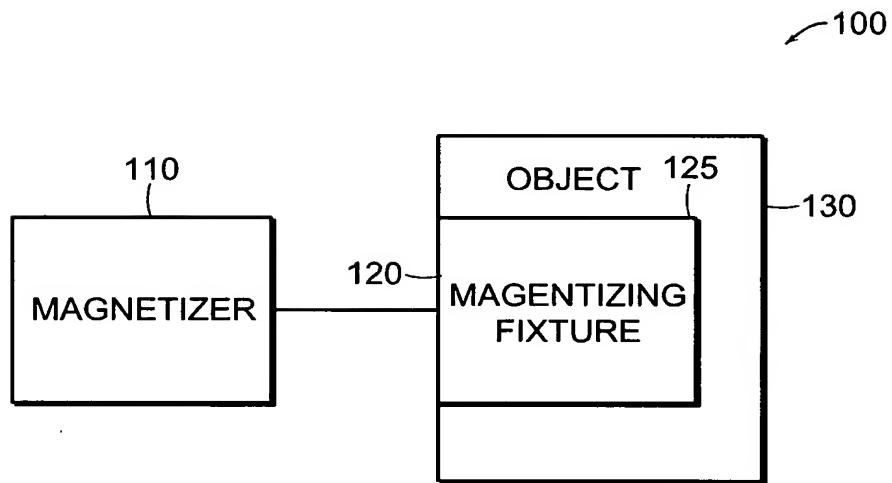


FIG. 1


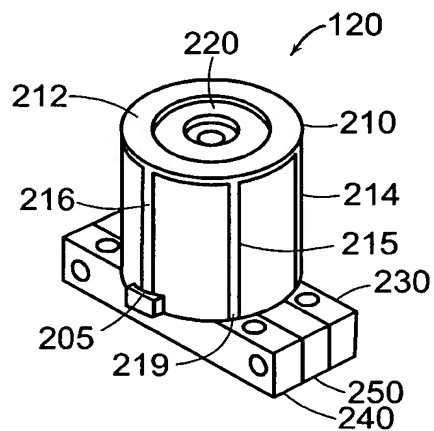


FIG. 2



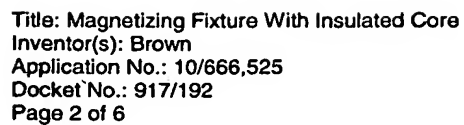


A cross-sectional view of a device 120. The device features a central core 212 surrounded by a layer 213. A component 230 is attached to the right side of the core, containing sub-components 240, 250, and 260. The device is also shown with a layer 216 at the bottom and a layer 220 on the left side of the core.

Fig. 10 is a cross-sectional view of a second embodiment of the device. It shows a base 120 with two circular features. On top of the base is a component 215, which has a central protrusion 216 and two side flaps 217.

A cross-sectional view of a device 120. The device has a central rectangular region 215 flanked by two vertical regions 214. The entire structure is enclosed within a top boundary. Below the central region 215, there are two vertical lines extending downwards, suggesting a base or support structure.

FIG. 3C

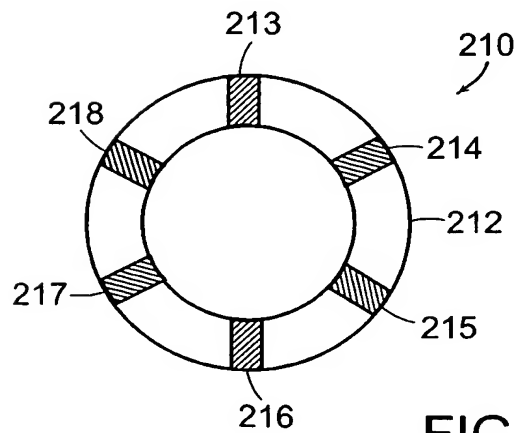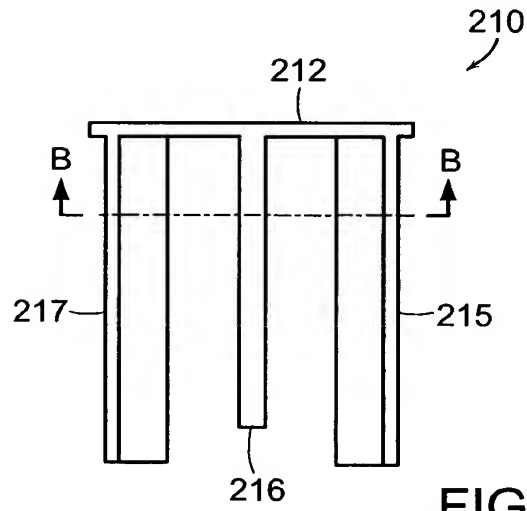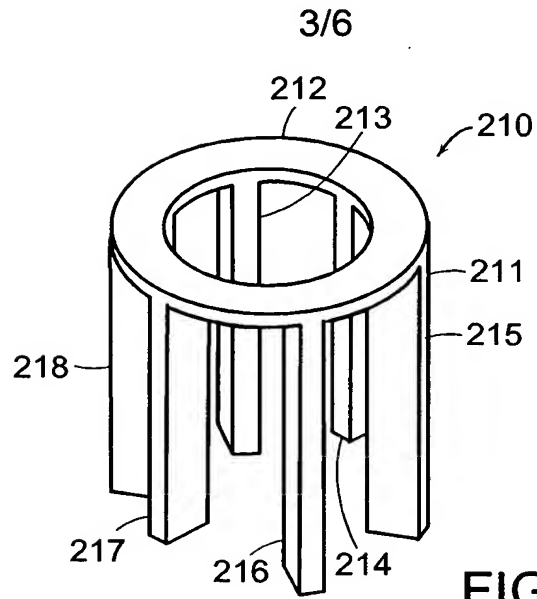



4/6

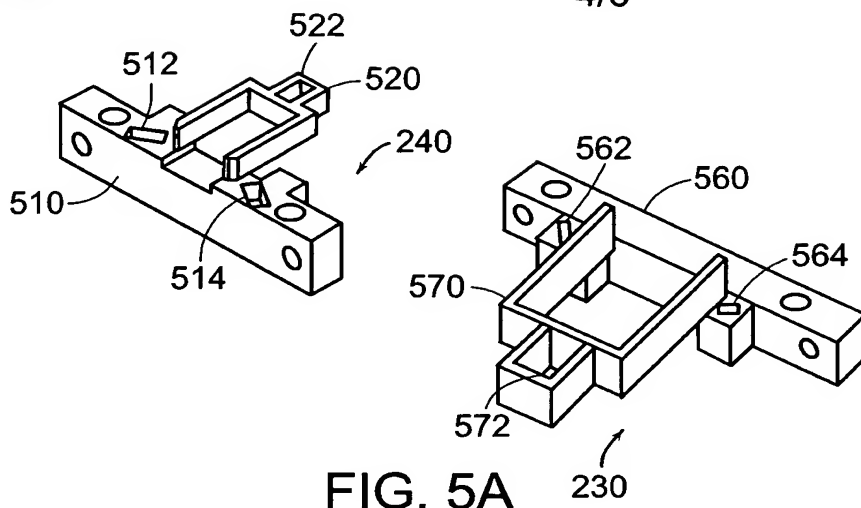


FIG. 5A


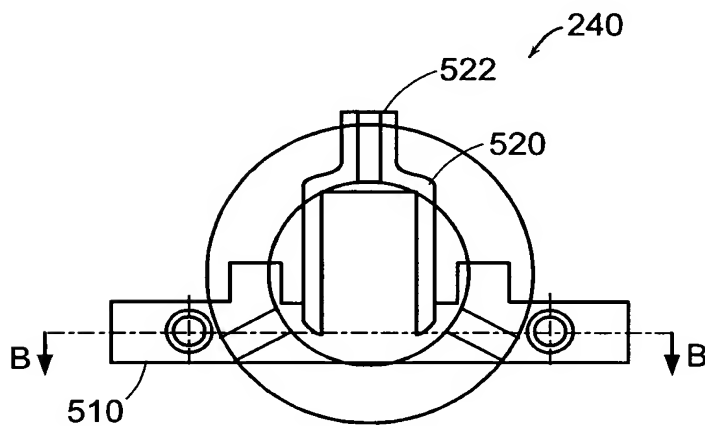


FIG. 5B

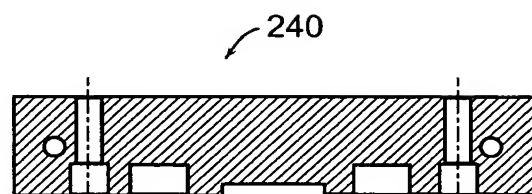

SECTION B-B

FIG. 5D


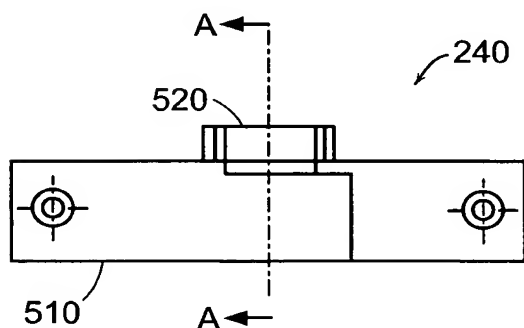


FIG. 5C



SECTION A-A

FIG. 5E



FIG. 6C



FIG. 6D



6/6

700

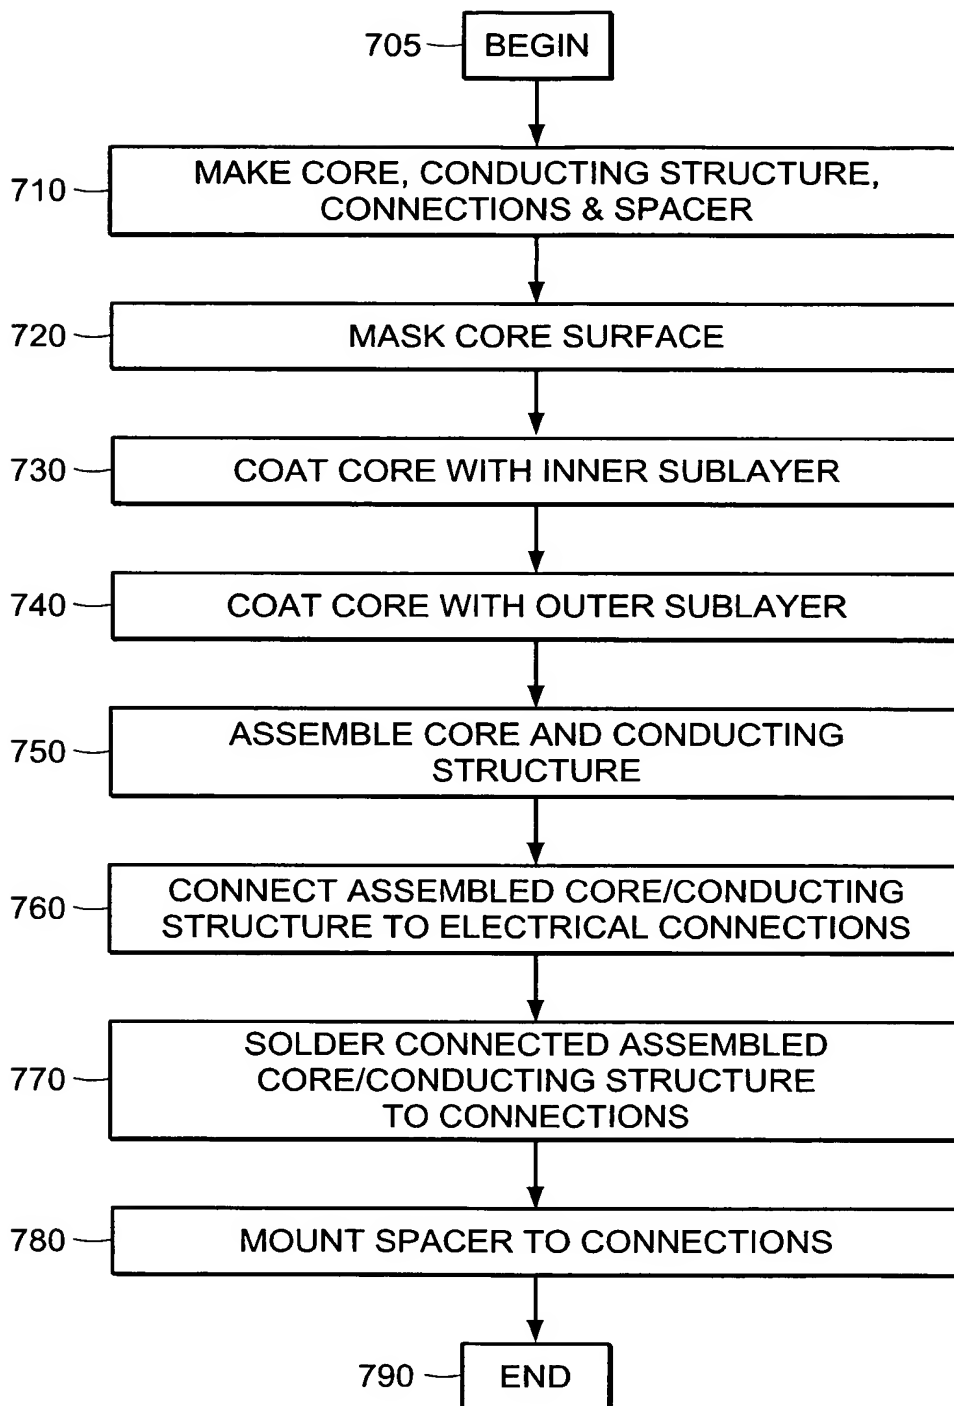


FIG. 7